










CA Metal In-Line Fans

The CA Metal range of in-line centrifugal fans provide intermittent and continuous ventilation in ducted applications in commercial and industrial premises such as shops, cafes, restaurants, pubs, gyms, sports clubs, schools, offices and much more.

TECHNICAL SPECIFICATIONS

- 5 model sizes stocked – 102mm/4", 150mm/6", 200mm/8", 250mm/10", 300mm/12"
- Ball bearing motors for long life
- External rotor motor and thermal protection
- High airflow rates for long duct applications
- Speed adjustable using optional controller
- Mounting bracket included
- IPX4 splash proof protection on all models.
- IMQ data label ensures data and performance is third party certified.
- Conforms to international standards: CEI EN 61 – 28 standards.

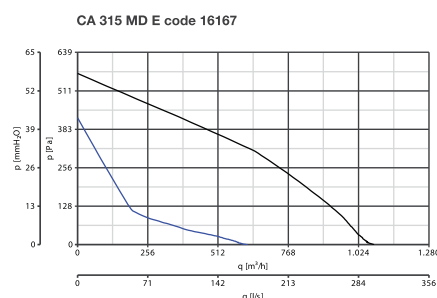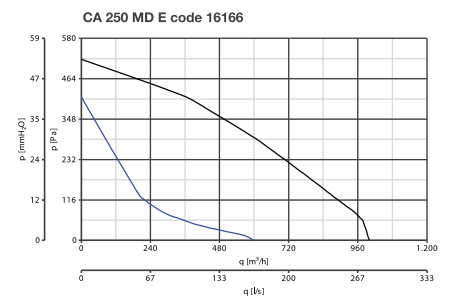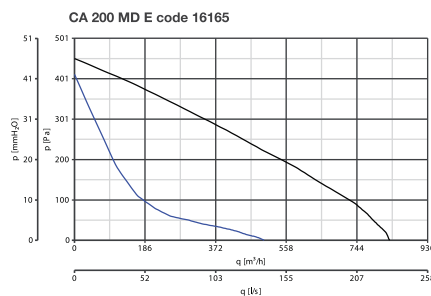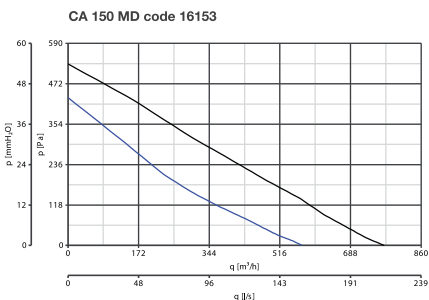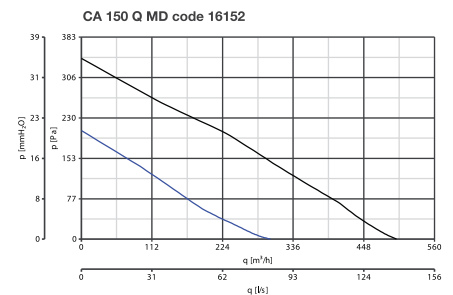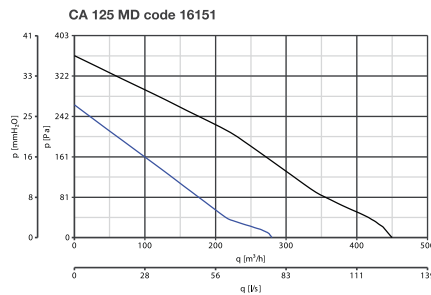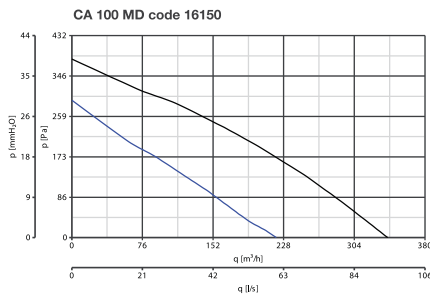

SPEED
— max
— min



CA Metal In-Line Fans

The CA Metal range of in-line centrifugal fans provide intermittent and continuous ventilation in ducted applications in commercial and industrial premises such as shops, cafes, restaurants, pubs, gyms, sports clubs, schools, offices and much more.

CA Range **LONG LIFE 30.000h**


Suitable for commercial and industrial applications: kitchens, bathrooms, offices, laboratories, factories, stores, dry cleaners, shops, restaurants, bars, theatres, dance halls, etc.

CODE	COMMERCIAL IN LINE FANS CA RANGE METAL	BOX QTY
16150	4"CA100 IN-LINE DUCT FAN (220-340 m ³ /h) (61-94 l/s)	4
16151	5"CA125 IN-LINE DUCT FAN (280-450 m ³ /h) (78-125 l/s)	1
16163 ▲	6"CA150 IN-LINE DUCT FAN (340-550 m ³ /h) (94-153 l/s)	1
16152	6"CA150 Q IN-LINE DUCT FAN (300-500 m ³ /h) (83-139 l/s)	1
16165 ▲	8"CA200 IN-LINE DUCT FAN (500-830 m ³ /h) (139-231 l/s)	1
16166 ▲	10"CA250 IN-LINE DUCT FAN (600-1000 m ³ /h) (167-278 l/s)	1
16167 ▲	12"CA315 IN-LINE DUCT FAN (620-1080 m ³ /h) (172-300 l/s)	1



16000 Inline Duct.

Dimensions (mm)

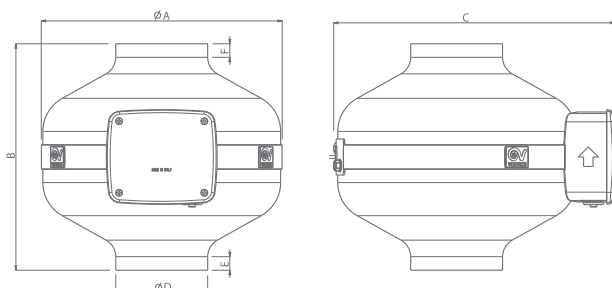

CA Range

Models	Ø A	B	C	Ø D	E	F	Kg
CA 100 MD	255	239	300	97	15	15	2.97
CA 125 MD				122	23	23	3.0
CA 150 Q MD				147	30	30	2.98
CA 150 MD	347	275	392	147	17	17	5.52
CA 160 MD				157	18	18	5.47
CA 200 MD				197	20	17	5.43
CA 250 MD				247	38	35	6.55
CA 315 MD	406	306	455	312	36	30	9.47
CA 150 MD E	347	275	392	147	17	17	6.1
CA 160 MD E				157	18	18	6.3
CA 200 MD E				197	20	17	6.0
CA 250 MD E				247	38	35	7.6
CA 315 MD E	406	294	455	312	21	30	11.0

Dimensions (mm)

▲ : NON STOCK PRODUCTS SPECIAL ORDER REQUIRED