


Vort Platt ES

The Vort Platt ES is Central Extractor Fan System for Continuous ventilation of Apartments with 4 Rooms such as kitchen, bathrooms, toilets and utility rooms. Splash proof IPX4.

TECHNICAL SPECIFICATIONS

- Designed for continuous running in accordance with ADF system 3
- Sap Appendix Q Eligible
- Time – saving flow regulation set up allows for very easy set up
- Suitable for horizontal or vertical mounting on walls or ceilings
- 3 alternative settings to select configuration
- High efficiency, electronically controlled, brushless motor
- Electronically controlled 2 speed motor
- Timer: 30 minutes
- Offers high performance low power consumption and low noise
- Motor shaft mounted on ball bearings
- Inlets: 1 x 125mm + 3 x 80mm diameter
- Outlet: 1 x 125mm diameter
- Rear flange made of ABS
- Insulation class: CL. II.

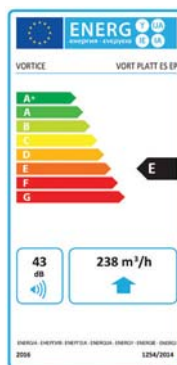


Vort Platt ES Central Extract Fan NEW PRODUCT


CODE	VORT PLATT ES CENTRAL EXTRACTOR FAN SYSTEM CONTINUOUS VENTILATION OF APARTMENTS	BOX QTY
11813	Vort Platt Es Central Extractor Fan	1

Vort Platt ES Accessories

CODE	ACCESSORIES FOR VORT PENTA RANGE OF CENTRAL EXTRACT FAN SYSTEM	BOX QTY
91008	80mm Fixed Ceiling Grille	1
91009	125mm Fixed Ceiling Grille	1
P0596/082/26	82mm PVC Flexible Ducting 1.5m	1
P0440/133/35	127mm PVC Flexible Ducting 1.5m	1
VKC 603	125mm - 100mm Reducer	1
VKC 51	100mm - 80mm Reducer	1

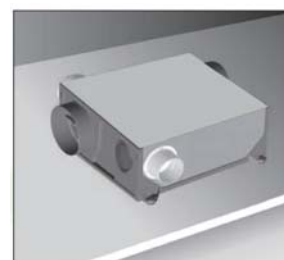

Dimensions (mm)

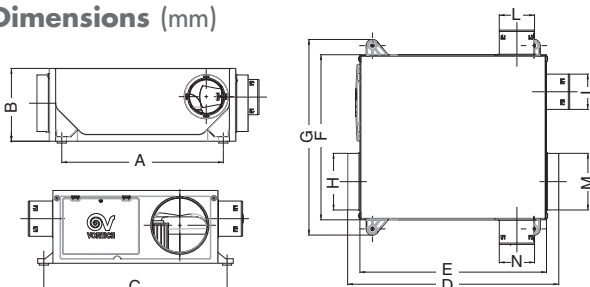

	A	B	C	D	E	F	G	ØH	ØI	ØL	ØM	ØN	O
VORT PLATT ES	355	160	403	478	410	363	430	124.5	77.5	77.5	124.5	77.5	54

Product	Code	V~50Hz	Air flow (m³/h)		Pressure (Pa)		Power (W)		Noise Level dB (A)		IP	°C	kg	Approvals	Insul.
			min. speed	max speed	min. speed	max speed	min. speed	max speed	min. speed	max speed					
Vort Platt ES	11813	230	215	315	49	142	5	14.5	26.5*	36	X4	60	4		cl. II

*Lp dB(A) measured at 3 m in configuration 3+1.