



Quadro Centrifugal Surface Fans


The Quadro range is a stylish wall or ceiling mounted range of centrifugal fans. Three sizes Micro, Medio or Super to comply with the requirements of bathrooms, toilets, kitchens or utility rooms. Air extraction from four sides of the Fan has an especially attractive design. Splash proof IPX4. Can be ducted 10m.

TECHNICAL SPECIFICATIONS


- 100mm diameter spigot standard
- 13 models available with or without the option of timer or humidity control
- Low Carbon/Low Watt models available
- 2 Speed
- Surface mounted
- Simple to install just 3 screws, one for safety and two for fastening.
- Fitted with washable filter easy to maintain.
- Low noise
- Low power consumption yet excellent airflow.
- Wall or ceiling mounted
- Can be ducted up to 10m
- IPX4 splash proof protection on all models.
- IMQ data label ensures data and performance is third party certified.
- Conforms to international standards: CEI EN 60335-2-80, CEI EN 60529 (code IP) and CEI 107-53/1986.
- Eco-Friendly: Recyclable materials have been used and the "Design for Disassembly" technique has been followed (2002/96/EC-WEE)




Pressure/Performance Curves

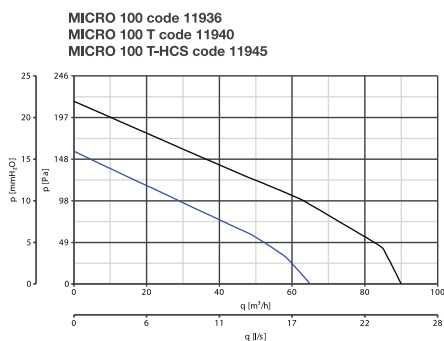

11936, 11940, 11945

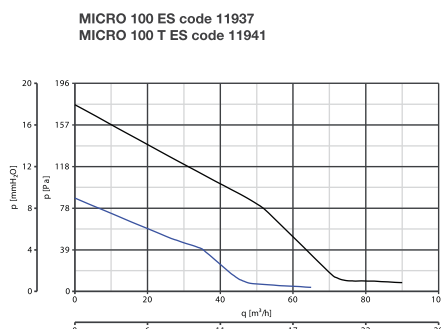


11937, 11941

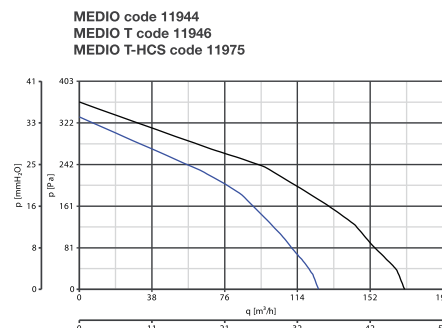

11944, 11946, 11975

SPEED
— max
— min

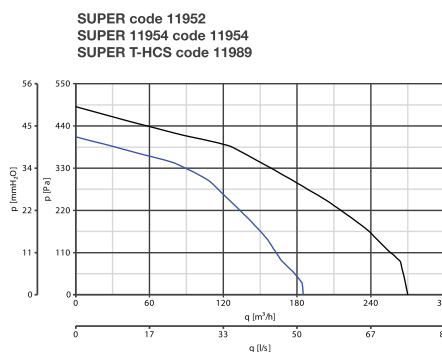

11937



Quadro Centrifugal Surface Fans

The Quadro range is a stylish wall or ceiling mounted range of centrifugal fans. Three sizes Micro, Medio or Super to comply with the requirements of bathrooms, toilets, kitchens or utility rooms. Air extraction from four sides of the Fan has an especially attractive design. Splash proof IPX4. Can be ducted 10m.

Quadro ES Surface LOW WATT FANS

CODE	QUADRO ES LOW CARBON SURFACE DUCT FANS WALL / CEILING MOUNTING IPX4 2-SPEED LOW WATT	BOX QTY
11937 ▲	QUADRO ES MICRO FAN (65/90m ³ /h)(18/25l/s) 2-SPEED (8/15watts)	4
11941	QUADRO ES MICRO FAN c/w Timer (65/90m ³ /h)(18/25l/s) 2-SPEED (8/15watts)	4


Quadro Range Surface

CODE	VORT QUADRO SURFACE DUCT FAN 100mm WALL / CEILING MOUNTING IPX4 2-SPEED	BOX QTY
11936	QUADRO MICRO FAN (65/90m ³ /h) (18/25 l/s)	4
11940	QUADRO MICRO FAN c/w Timer (65/90m ³ /h) (18/25 l/s)	4
11944	QUADRO MEDIO FAN (125/170m ³ /h) (35/47 l/s)	2
11946	QUADRO MEDIO FAN c/w Timer (125/170m ³ /h) (35/47 l/s)	2
11952	QUADRO SUPER FAN (185/270m ³ /h) (51/75 l/s)	2
11954	QUADRO SUPER FAN c/w Timer (185/270m ³ /h) (51/75 l/s)	2

Quadro Humidity Surface T-HCS Humidity Control System - Timer


CODE	VORT QUADRO HUMIDITY CONTROL FAN 100mm WALL / CEILING MOUNTING IPX4 2-SPEED	BOX QTY
11945	QUADRO MEDIO T-HCS FAN	
11975 ▲	QUADRO MEDIO T-HCS FAN (125/170m ³ /h) (35/47 l/s)	4
11989 ▲	QUADRO SUPER T-HCS FAN (185/270m ³ /h) (51/75 l/s)	2

Dimensions (mm)

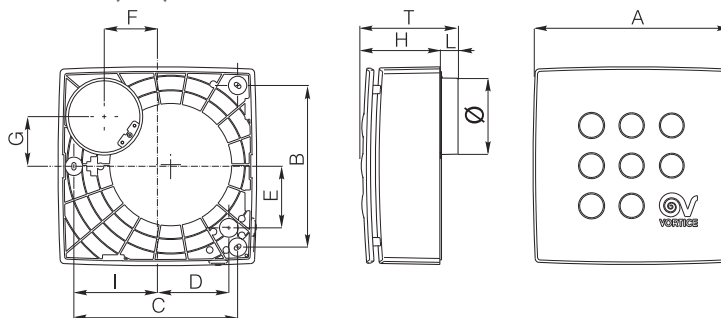

	A	B	C	I	E	D	G	F	L	H	T	Ø	KG
MICRO 100	239	195	197	100	74	85	60	64	20	97	117	92,5/97	1,80
MEDIO	261	212	215	110	82	95	69	75	20	119	138	92,5/97	2,54
SUPER	290	236	239	125	92	108	81	87	20	144	164	92,5/97	3,77

▲ : NON STOCK PRODUCTS SPECIAL ORDER REQUIRED



The air is extracted laterally through an opening concealed beneath the outer cover and drawn from all around the product. Possible dust deposits are invisible from the outside whereas the outer cover remains perfectly clean.



Backdraught shutter. Integrally installed on the appliance, it prevents return air when the appliance is switched off.